



CASE STUDY

MERLIN CONNECTORS

ENGLAND, WARRINGTON OFFICE

📍 Dornoch House, The Links
Birchwood
Warrington, WA3 7PB

☎ +44 (0)1925 414000

✉ Gordon.Davidson@sonomatic.com

🌐 www.sonomatic.com




1. INTRODUCTION

A client required an ROV deployed inspections of critical zones on Merlin connectors for possible fatigue cracking.



2. CHALLENGES

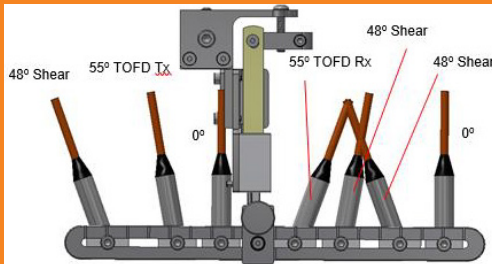

Some of the connectors were within a Base Tank at 140m on the seabed. There was restricted access to gain entry to the Tanks and some of the connectors were in compartments 60m away from the main entrance. A mother ROV would deploy to the entrance, then a deployment ROV would be a small "observation" class LBV vehicle with limited dexterity and thrust/pull capabilities. Limited lighting/no cleaning capabilities. "Dead sub" scenario was a significant risk once the scanner was magnetically adhered to, so a release mechanism needed to be designed. Challenges ultrasonically were to offer a complete inspection suit that covers all the weak locations identified by the fatigue analysis, both internally & externally on the connector.



3. INNOVATION

A multiple probe array of selected shear wave angles and TOFD was developed and validated. A dual-axis magnetic scanner was built (MAG-Nautilus) to ensure neutral buoyancy with a magnetic release mechanism for any dead sub scenario and to allow the LBV to deploy/remove from the connectors.



4. OUTCOME

The complete system was validated and successfully deployed, with repeat/monitoring inspections now performed annually.

