


Belt Scanner

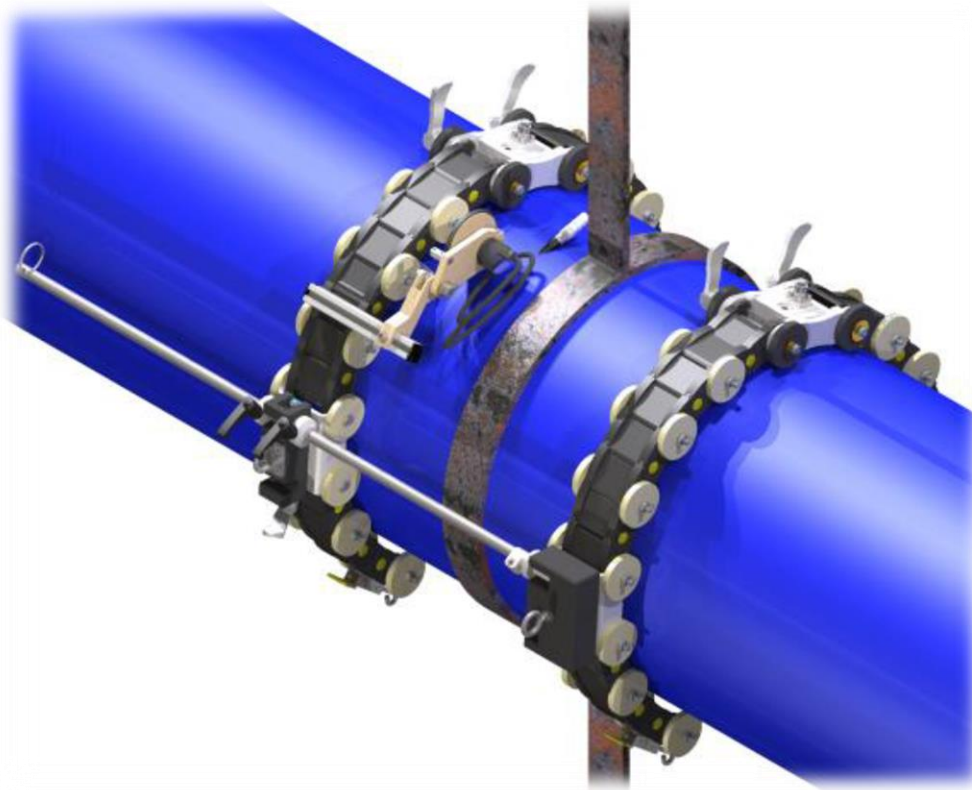

- **Weight:** <10Kg /belt, depending on setup
- **Dims:** Max belt width 188mm, setup width: 844mm
- **Clearance Required:** 150mm typical, 100mm abs. min. without eyelets
- **Environment:** Splash Proof
- **Operating Temperature:** 5°C to +55°C
- **Max OD:** 36"
- **Min OD:** 8"
- **Scan Speed:** As dictated by operator
- **Positioning:** Rotational position encoded
- **Umbilical:** 15m
- **UT Measurement Channels for:**
 - E.M.A.T
 - CHIME
 - MultiSkip
- **Control Pod Power Supply:**
 - External battery for EMAT pre-amps
 - Internal battery for,
 - PowerBoxH
 - Microplus II
 - CHIME/MSkip PreAmp
- **Attachment Method:** Spring tension via quick release over centre clamp

General Features

- Tool-free deployment
- Easily adjustable diameter modification
- Live data collection
- EMAT probes for pipes with coatings providing couplant-free inspection
- Spring loaded CHIME & Multi-Skip probe holder for good surface contact on rough surfaces
- Rugged and compact design for tight access areas
- Easy, tool free adjustment for reduced on-site setup time
- Multiple attachment points for rope deployment
- Long Cable bundle lengths available for safer, ground-based data collection
- Diametric magnetic locking on connecting rod ends, allowing ease of navigation around awkward pipe clamps.

Dimensions

