





SONOMATIC

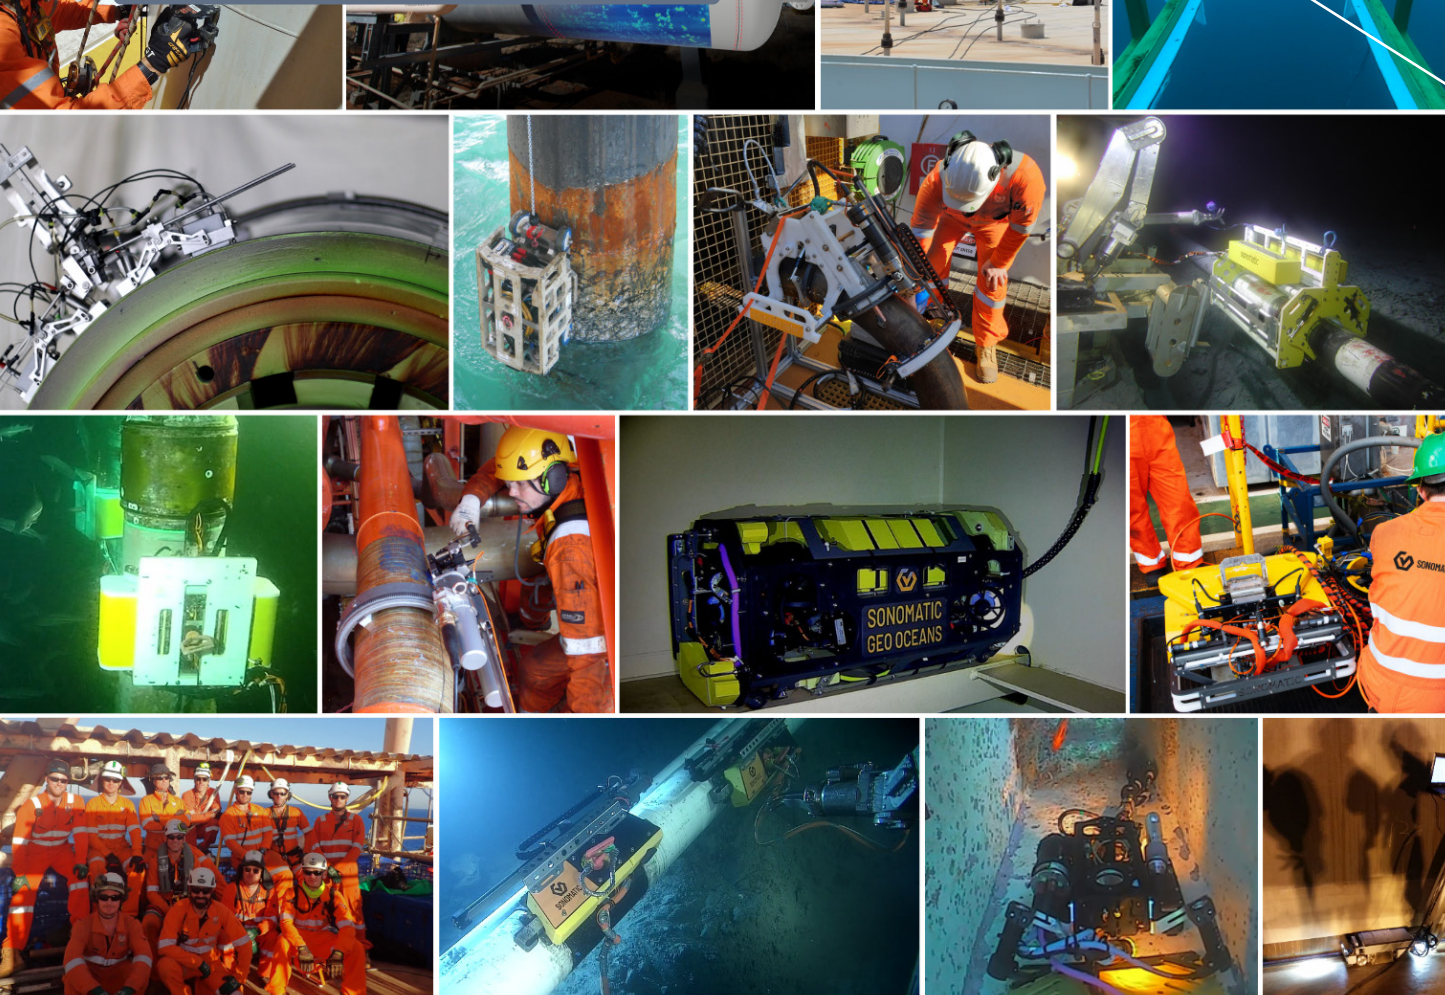

SUBSEA MANUAL UT SYSTEM

This system is comprised of a Topside Module, consisting of a fully integrated ultrasonic digital flaw detector, connected via a 250m umbilical to a Slave Subsea Module. A split screen facility is provided for on the Topside Module, for both video and ultrasonic display, which is then interfaced to the driver's slave subsea UT system.

The compact system provides state of the art user interface and control facilities with the subsea unit housed in a lightweight ruggedized base. The system permits real-time video recording with remote monitor viewing.

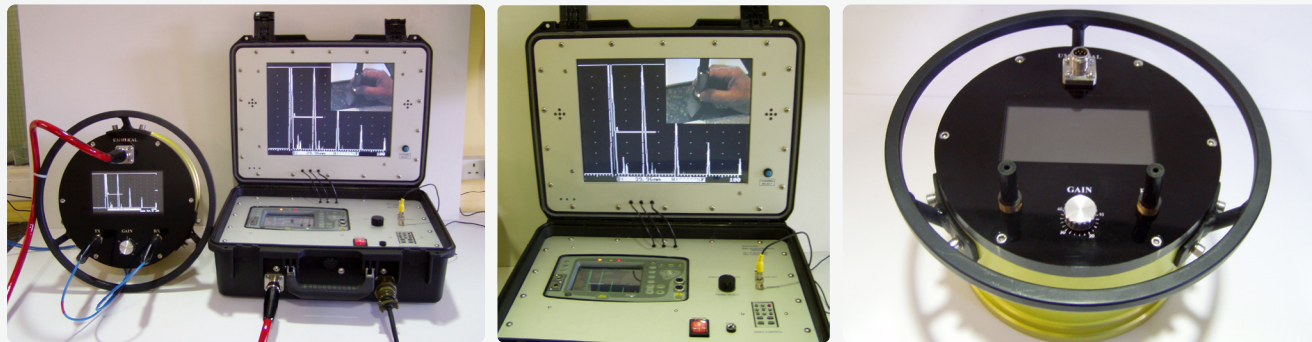


DIVER UNIT

The new Diver Digital Flaw Detector Unit is a compact, simple-to-use subsea unit. Just 250mm high and 380mm in diameter (including handle ring) and weighing 14kg in air, the Digital Flaw Detector is easily deployed and operated by the diver.


The screen has a clear vision area of 160mm x 100mm. The diver has only a single control function to operate which is the gain control for indication investigation.

All power to the subsea unit is provided from the surface unit. Probes can be changed sub-sea as both unit and probes are fitted with the wellproven EO Subsea Connectors. The Subsea Pod's working voltage is 24V.

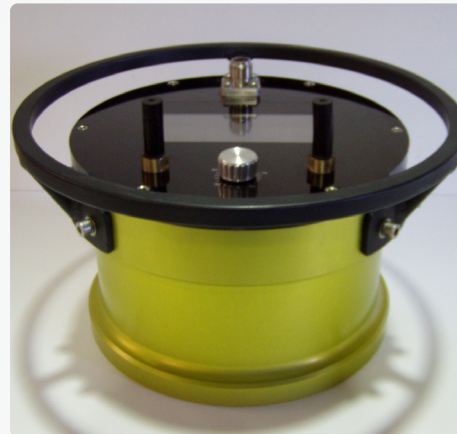

Inside the case, the controls have been designed to be simple to use. The main screen is in the lid of the case with the digital flaw detector screen in the main body. Controls are the main on/off switch, single/twin crystal selection, various terminations for computer or VCR connections and a remote control for the main screen menus.

The Topside Module weighs 12kg. Dimensions: 500mm x 400mm x 150mm.

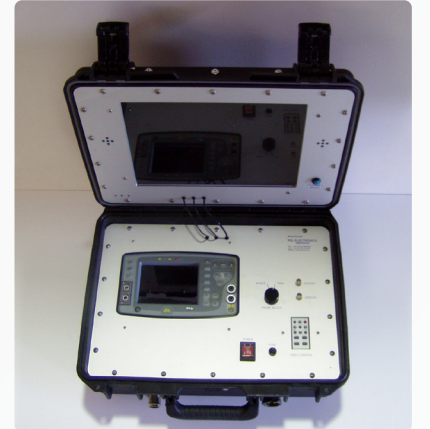

UMBILICAL

The Umbilical is 250m in length and supplies power to the Subsea Unit as well as receiving signals from the worksite. It is supplied on a small hand-cranked reel.

The Reel and Umbilical weigh 75kg. Dimensions: 800mm x 520mm x 550mm.



TOPSIDE MODULE

The Topside Module is supplied in a rugged, dust proof case. Only two cables are terminated on the front of the unit, these being the mains power source and umbilical.

QA AND HS&E

Sonomatic operate under an integrated QHSE management system and are committed to the highest quality and safety of service provision | ISO 9001: 2015: 00007140 | ISO 14001:2015:00037371 | ISO 45001:2018:00037372 | ISO 17020: 2012: 4276 | Achilles FPAL Verified: 076712 | SEQual 1988 | British Safety Council Member: S0388440 |



KEY CONTACTS

EUROPE AND AFRICA

Graham Marshall
Subsea Project Manager
T: +44 (0) 1224 823 960
E: Graham.Marshall@sonomatic.com

Stuart Ley
Topside Project Manager
T: +44 (0) 1224 823 960
E: Stuart.Ley@sonomatic.com

Danielle Gunns
Project Delivery Manager (Warrington)
T: +44 (0) 1925 414 000
E: Danielle.Gunns@sonomatic.com

Charles Loader
General Manager - Europe & Africa
T: +44 (0) 1925 414 000 | M: +44 (0) 7376 714 765
E: Charles.Loader@sonomatic.com

MIDDLE EAST

Clayton Webb
Regional Manager
T: +971 26 580 708
E: Clayton.Webb@sonomatic.com

AUSTRALASIA

Jonathan Millen
Operations Manager - Australia
T: +61 415 850 346
E: Jon.Millen@sonomatic.com.au

Alex Cesan
General Manager - Australia & NZ
T: +61 498 442 666
E: Alex.Cesan@sonomatic.com.au

Zach McCann
Region Manager - South East Asia
T: +60 12 555 1569 | M: +61 404 797 670
E: Zach.Mccann@sonomatic.com.my

AMERICAS

Esteban Cesan
General Manager
T: +1 832 977 0303
E: Esteban.Cesan@sonomatic.com

Agata Surowiec
Business Development, Sales & Project Manager
T: +1 832 318 3314
E: Agata.Surowiec@sonomatic.com



SONOMATIC

www.sonomatic.com